

## Melbourne Collection - Coral Bay




**Tile size: 1200\*600\*4.8mm**

SQM / PC 0.72

Weight / PC 8kg

Weight / SQM 11kg

### Available sizes

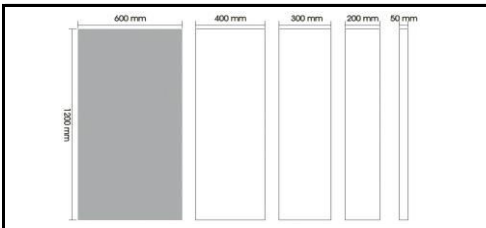

*\* not all featured formats are available in the colours indicated. Please consult porcel-thin®.*

<b>Descriptive Colour</b>	Pebble / V1
<b>Finish</b>	Matt
<b>Product Code</b>	<b>M02</b>
<b>Applications</b>	Residential / Commercial
<b>Light Reflectance Value</b>	50
<b>Slip Resistance Value</b>	Dry-PTV44 / Wet-PTV12

### Physical properties

Test	Standard	Requirement	Typical test value
Length/Width	ISO 10545-2	±0.5%≤±2mm	±0.4%
Straightness of Sides	ISO 10545-2	±0.3%≤±1.5mm	±0.2%
Rectangularity	ISO 10545-2	±0.5%≤±2mm	±0.2%
Water Absorption	ISO 10545-3	≤0.5%	≤0.1%
Modulus of Rupture	ISO 10545-4	35 N/mm <sup>2</sup>	49.8 N/mm <sup>2</sup>
Breaking Strength	ISO 10545-4	700N	850N
Thermal shock resistance	ISO 10545-9	Required	Resistant
Chemical Resistance	ISO 10545-13	Min Class B	Class A
Stain Resistance	ISO 10545-14	Min Class 3	Class 5
UV Colour Resistance	/	/	Unaffected by light

### Advantage

**Scratch Resistant**  
Special surface; resistant to topical and deeper scratches; retains high surface quality even when cleaned frequently

**Heat Resistant**  
Fire and heat resistant;no toxins released in the case of fire

**Chemical Resistant**  
Resistant to organic and non-organic solvents,sanitizers and detergents; easy to clean; surface and deco-colors do not wash off

**Environmentally Friendly**  
Manufactured from natural materials;does not release toxin into the environment; efficient use of energy and materials

**Low Water Absorption**  
Extremely low water absorption rate makes slim water and frost resistant

**No Color Variation**  
Ceramic character resists against sun radiations;high color-stability even under extreme weather conditions

**Sanitary Surface**  
Food-contact safe; non-solvent and zero-release

**Versatile**  
Could be combined with other building/decorating materials;could be cut into any size to satisfy any design

**Convenient For The Renovation**  
Porcelain panel is convenient for the renovation of old buildings and houses.

**Easy Cutting**  
Simpler, more imposing and more elegant.Free design,application and cutting as you pleases Free matching and free cutting like the cutout of clothing.

[www.porcel-thin.com](http://www.porcel-thin.com) / [info@porcel-thin.com](mailto:info@porcel-thin.com)

The colour shown on the tile product in this data sheet is as accurate as the limitations of the printing process will allow. Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. The slip resistance values provided are correct at the time of testing and represent the standard production value. The pendulum test results have been displayed in line with the Health and Safety Executive guidelines whereby 0-24 represents a high slip potential, 25-35 signifies a moderate slip potential and 36+ represents a low slip potential. Porcel-Thin® is a division of Far Eastern European Trading Co.,Ltd, Unit 17 Rotherhithe Business Estate, 214 Rotherhithe New Road, London SE16 3EH, Registered in England number 5004756. All rights reserved.